

CLC 60-100– Enclosure air condition

Side mounting

DESCRIPTION

CLC series air conditioners, for mounting in the cabinet (floor-standing), are specially designed to cool series of juxtaposed. Indeed their high cooling capacity and their high static pressure fan allows them to process up to 6 electrical cabinets of 800mm.



STANDARD EQUIPMENT

- Adjustable electronic thermostat factory set at 35 °C
- Connection to terminal board
- Gasket IP 54
- Paint RAL 7035
- Aluminium cleanable air filter
- Antifreeze thermostat
- Fixing with threaded inserts
- Anti-short cycle temporization


OPTIONS

- Different available tensions and frequencies (AC or DC)
- Condensation pressure control (to operate with an ambient temperature lower than 20°C)
- Different RAL painting
- Electronic thermostat with filter clog and high temperature alarm on free voltage contact
- "outdoor" model

PERFORMANCES

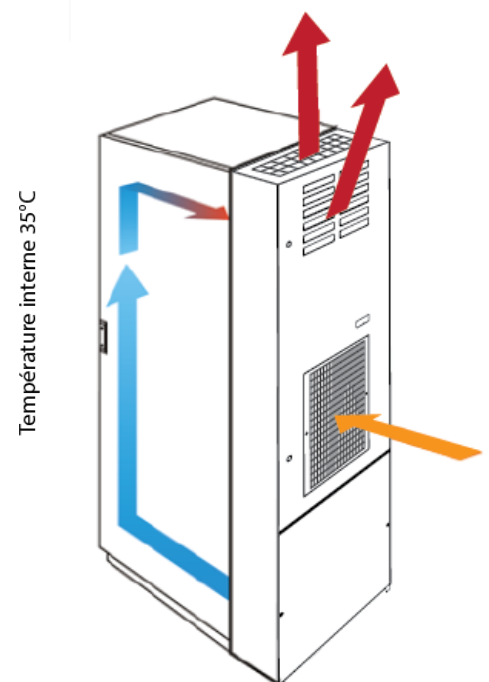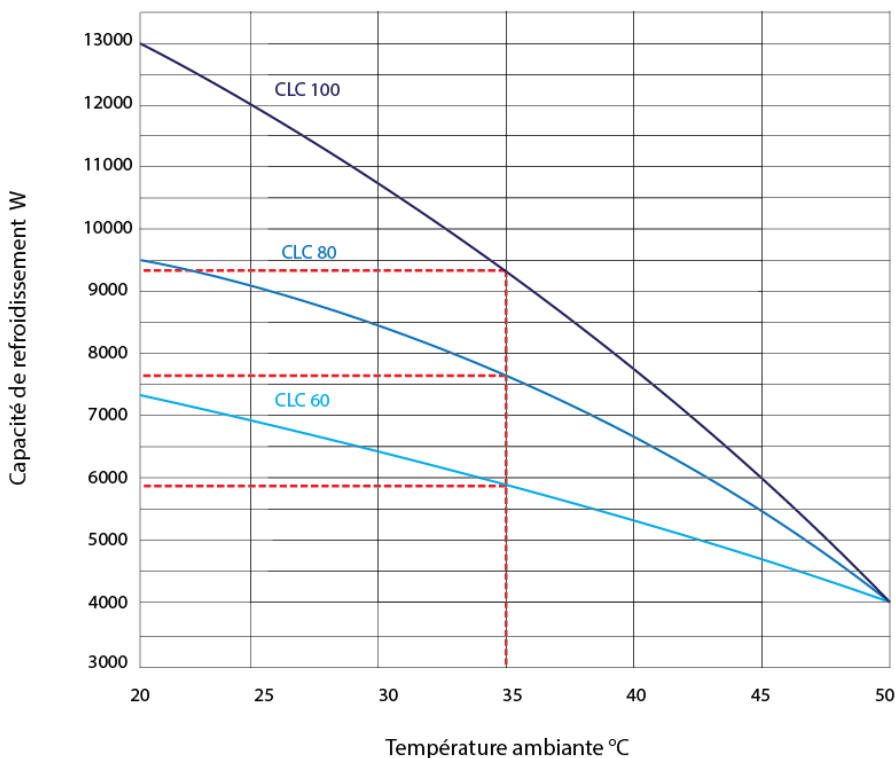

DIMENSIONAL DRAWING

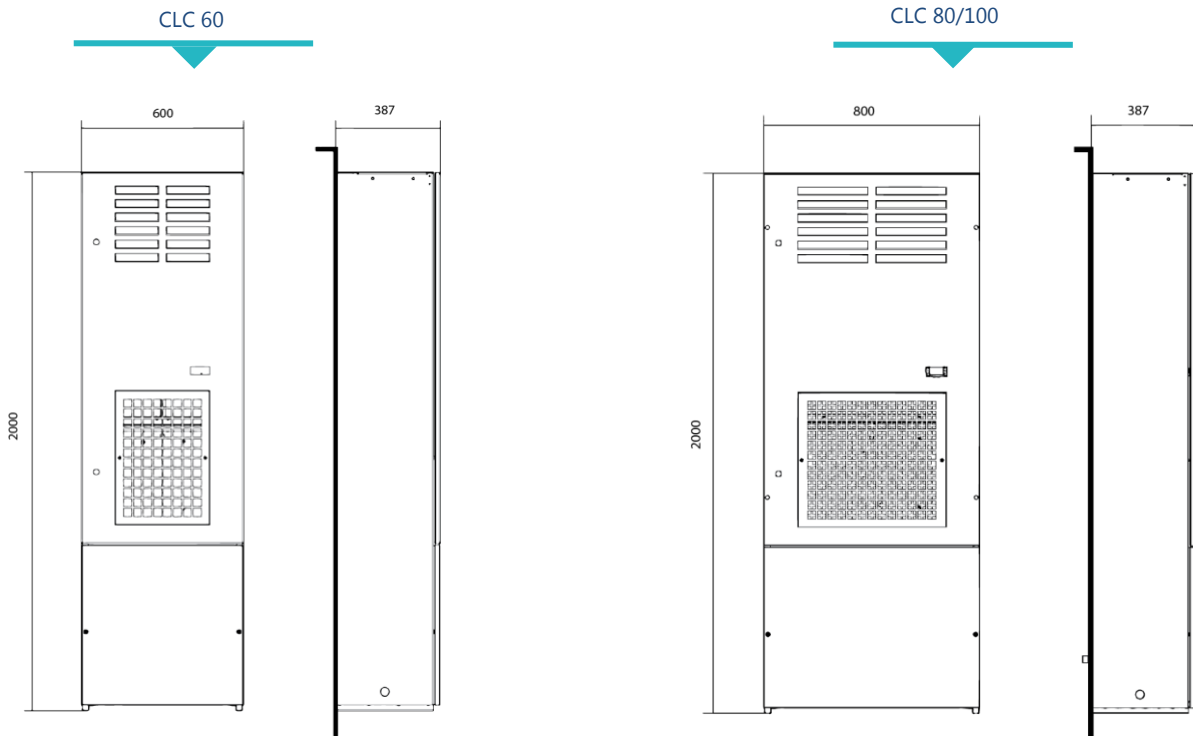

CARACTERISTIQUES TECHNIQUES DETAILLEES

			CLC 60 TAI	CLC 80 TAI	CLC 100 TAI
Power supply		V-HZ	400-3-50	400-3-50	400-3-50
Cooling capacity	L35L35	W	5800	7600	9400
	L35L50	W	4350	5700	7000
Power Input	L35L35	W	2340	3300	3650
Current	Nominale	A	6	8.1	9.1
	De démarrage	A	21.7	31	31
Protection line		A	8	16	20
Noise		dB(A)	72	75	77
Réfrigérant			R134a	R134a	R134a
IP	Interne		54	54	54
	Externe		34	34	34
Weight		kg	150	160	180
Ambient temperature		°C	20/50	20/50	20/45
Dimensions	L	mm	2000	2000	2000
	H	mm	600	800	800
	P	mm	387	387	387